


eMessenger

Message displays on two lines of 16 characters each for a maximum message of 256 characters, including spaces.

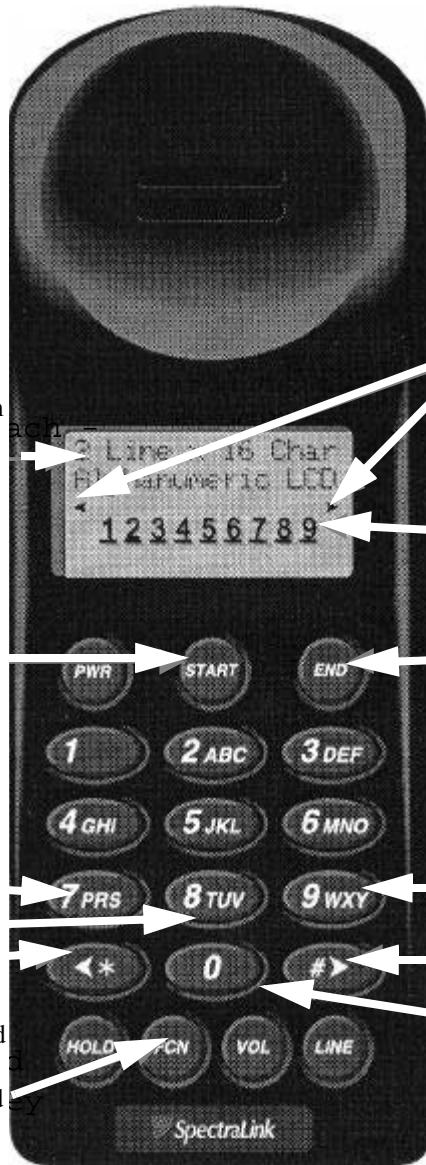

Right and Left arrow icons indicate additional message text.

Message queue – 9 messages maximum. Current message number

Answer an eMessenger call.

End an eMessenger call.

7 – Directory
8 – Lookup
* < – scroll left

9 – Email

> – scroll right

Press START, FCN, and the assigned macro key to start eMessenger and review messages

0 – Help on/off

Using eMessenger with your SpectraLink Wireless telephone

How do I . . .	What to do . . .
Assign a different ring type to an incoming eMessenger message	<p>To change the ring type:</p> <ol style="list-style-type: none"> 1 When the telephone is in standby, hold down the FCN key. 2 Press the right arrow once to get to Ring Type. 3 Press 0 to change. 4 Press the right arrow once to get to Auxiliary Ring 1. 5 Press 0 to change. 6 Press the right arrow to scroll through options. 7 Press 0 to select an option.
Receive a message	Listen for a message ring and then press START.
Read a message	Press right or left arrow key to view the entire message. Active right and left arrow icons on the display indicate additional message text in either direction. The date and time stamp indicates the end of the message.
Browse messages	To move between messages, press FCN then right or left arrow key.
Know how many messages are in the message queue	Up to nine messages are held in your message queue. The newest message is the last in the queue. If the queue is full, eMessenger deletes the oldest message to make room for an incoming message. Number icons 1–9 indicate how many messages you currently have in your message queue. The blinking number indicates which message you are currently reading.
Delete one message	<p>To delete one message</p> <ol style="list-style-type: none"> 1 While in eMessenger mode, press 3. 2 Press 1.
Delete all messages	<p>To delete all messages</p> <ol style="list-style-type: none"> 1 While in eMessenger mode, press FCN 2 Press 3 3 Press 1
Finish reading a message	Press END. eMessenger will automatically return to standby mode after 30 seconds (30 seconds is the default and can be changed by the System Administrator.)
Return to messages	To return to messages after ending an eMessenger call, press START, FCN, and the assigned macro key. The macro key can be any key assigned by the SpectraLink system administrator. When assigning the macro key, be careful not to use a key assigned to a telephone function.